

**512-698 MHz**

*Remote Rural Broadband - RRBS*



---

***RRBS Base Station Sector Panel Antenna***

***Model SVP600-60-14***



Broadband eight dipole panel covering the 512-698 MHz spectrum for the newly licensed Remote Rural Broadband Service. The radiating elements and structural dipoles are entirely welded to the support spine. This results in an enhanced reduction in PIM, even after many years of being in service.

The radome covering the dipoles and internal feed conductors allow this antenna to operate reliably under extreme snow, rain, frost, or icing conditions.

### ***Electrical***

Frequency: 512-698 MHz  
Gain: 14.0 dBd (16.1 dBi) w/o electrical beam tilt  
Beam width: 60 degrees at 600 MHz (-3dB pts)  
Impedance: 50 ohms  
VSWR: <1.5:1 (1.25:1 typical)  
Polarization: Vertical  
Max. Input Power: 500W standard, higher input power available  
PIM: < -135 dBc  
Input Connector: N female  
F/B Ratio: 22 dB  
XPD: 24 dB typical  
Beam tilt: Any degree of electrical or mechanical available

### ***Mechanical***


Weight: 40 lbs (without mounting hardware)  
Mounting: Hot dipped galvanized steel, customized to tower spec or standard pipe OD  
Radiating Elements: Structural Aluminum 8 dipole panel with machined brass connectivity  
Reflector: Galvanized sheet metal  
Radome: UV stabilized ASA  
Grounding: Antenna and radiating elements are fully DC grounded via the mounting hardware for lightning protection.  
Dimensions: 500mm wide X 2000mm long X 200mm deep  
Wind load: 1.63 kN Frontal, 500 N Lateral @ 160 km/h  
Vertical Height Req'd: 2.2 m / 7.2 feet

**512-698 MHz**

*Remote Rural Broadband - RRBS*



**Horizontal Plane – SVP600-60-14**

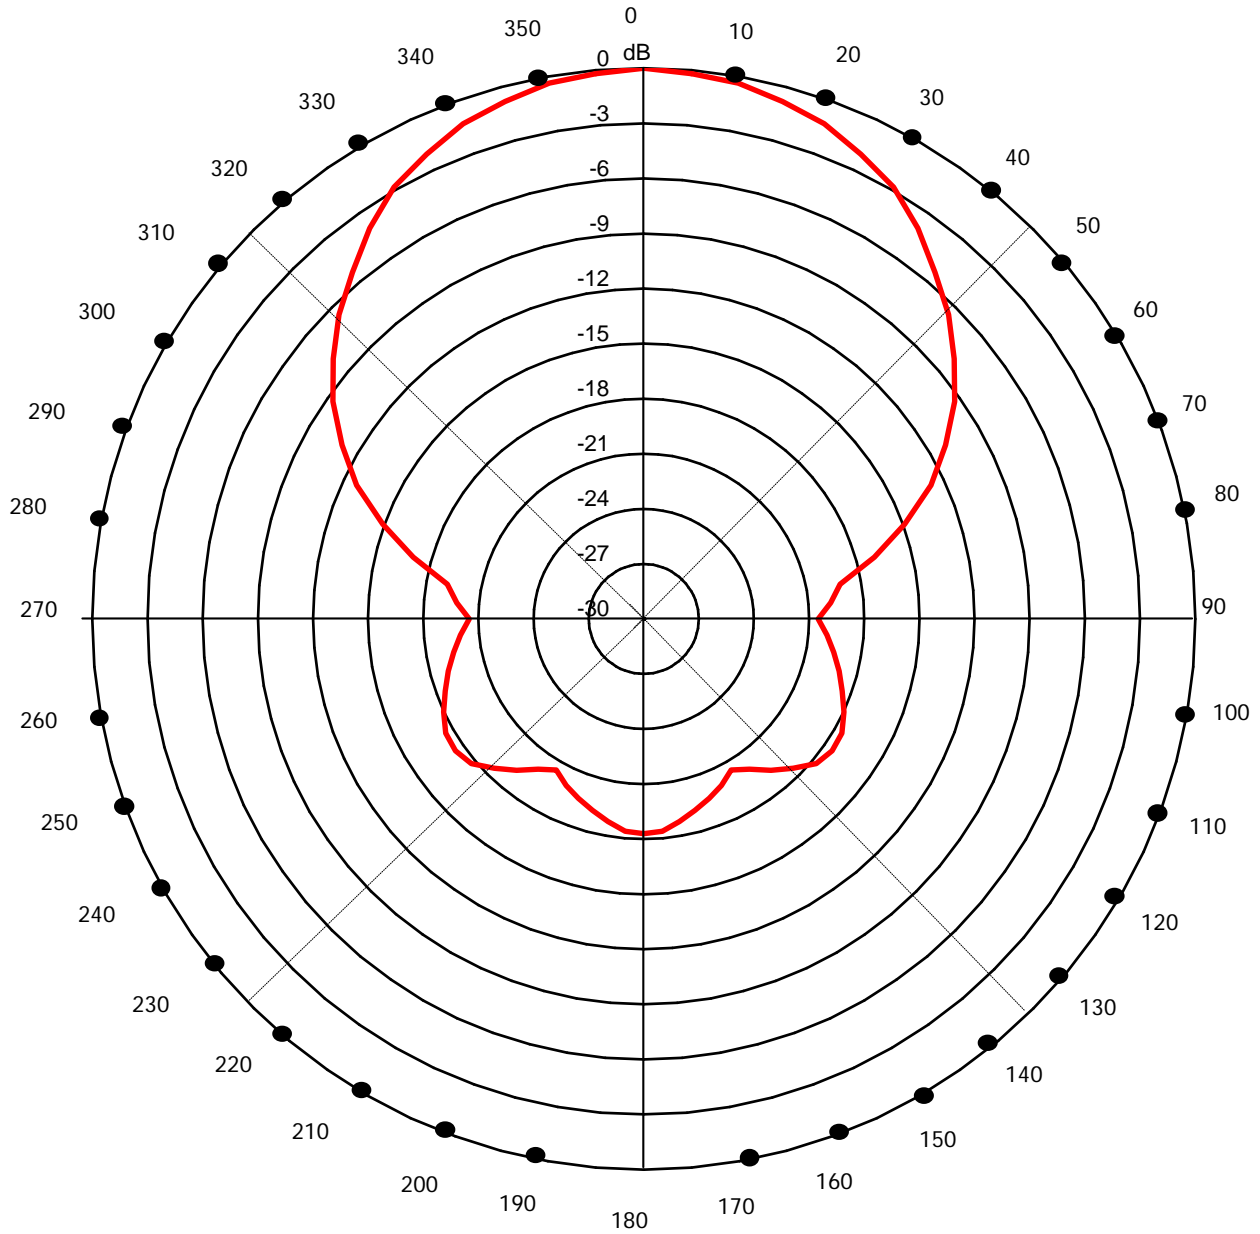

**512-698 MHz**

*Remote Rural Broadband - RRBS*



**Vertical Plane – SVP600-60-14**

