

512-698 MHz

Remote Rural Broadband - RRBS



RRBS Base Station Sector Panel Antenna

Model SVP600-90-12



Broadband eight dipole panel covering the 512-698 MHz spectrum for the newly licensed Remote Rural Broadband Service. The radiating elements and structural dipoles are entirely welded to the support spine. This results in an enhanced reduction in PIM, even after many years of being in service.

The radome covering the dipoles and internal feed conductors allow this antenna to operate reliably under extreme snow, rain, frost, or icing conditions.

Electrical

Frequency:	512-698 MHz
Gain:	12.5 dBd (14.6 dBi) w/o electrical beam tilt
Beam width:	90 degrees at 600 MHz (-3dB pts)
Impedance:	50 ohms
VSWR:	<1.5:1 (1.25:1 typical)
Polarization:	Vertical
Max. Input Power:	500W standard, higher input power available
PIM:	< -135 dBc
Input Connector:	N female
F/B Ratio:	22 dB
XPD:	24 dB typical
Beam tilt:	Any degree of electrical or mechanical available

Mechanical


Weight:	40 lbs (without mounting hardware)
Mounting:	Hot dipped galvanized steel, customized to tower spec or standard pipe OD
Radiating Elements:	Structural Aluminum 8 dipole panel with machined brass connectivity
Reflector:	Galvanized sheet metal
Radome:	UV stabilized ASA
Grounding:	Antenna and radiating elements are fully DC grounded via the mounting hardware for lightning protection.
Dimensions:	500mm wide X 2000mm long X 200mm deep
Wind load:	1.63 kN Frontal, 500 N Lateral @ 160 km/h
Vertical Height Req'd:	2.2 m / 7.2 feet

512-698 MHz

Remote Rural Broadband - RRBS



Horizontal Plane – SVP600-90-12

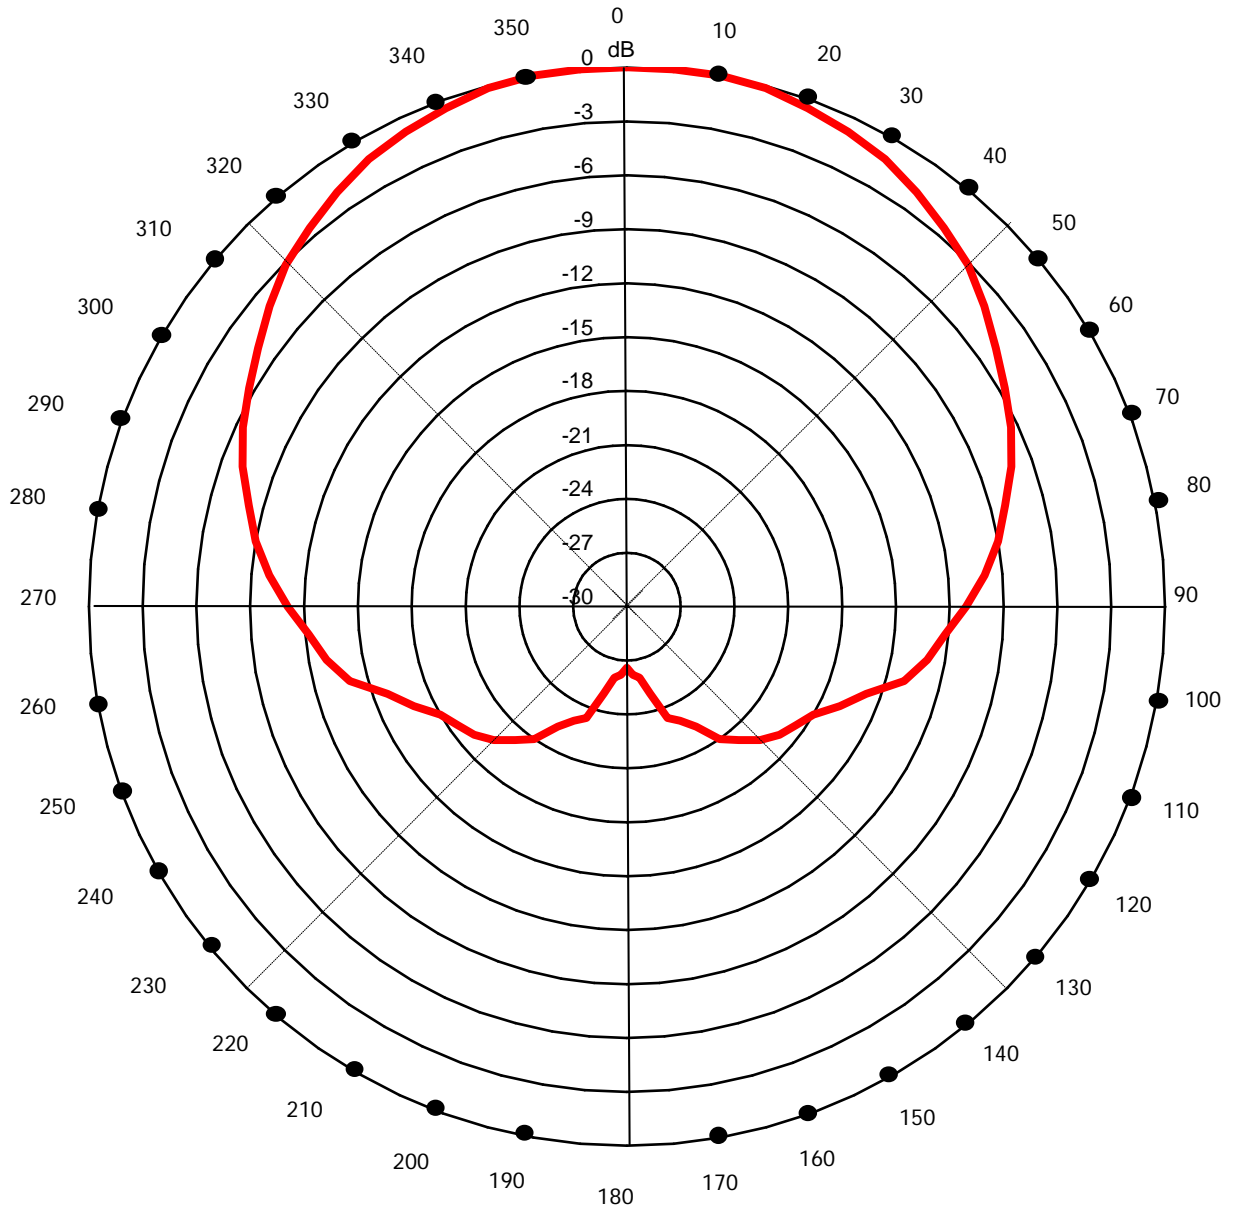

512-698 MHz

Remote Rural Broadband - RRBS



Vertical Plane – SVP600-90-12

