

**698-806 MHz**

*700 MHz Band*



---

***700 MHz Base Station Offset Dipole Antenna***

***Model ED700***



Omni-oid offset dipole antenna covering the 698-806 MHz spectrum. The entire antenna is constructed out of 6061 structural aluminum. All integral radiating joints are welded, not bolted, ensuring many years of reliable performance with low PIM.


Multiple bays of the ED700 can be stacked vertically to satisfy increased gain and power requirements. An external power divider and feed cables are included with each multiple bay array.

**698-806 MHz**


**700 MHz Band**



***Electrical***

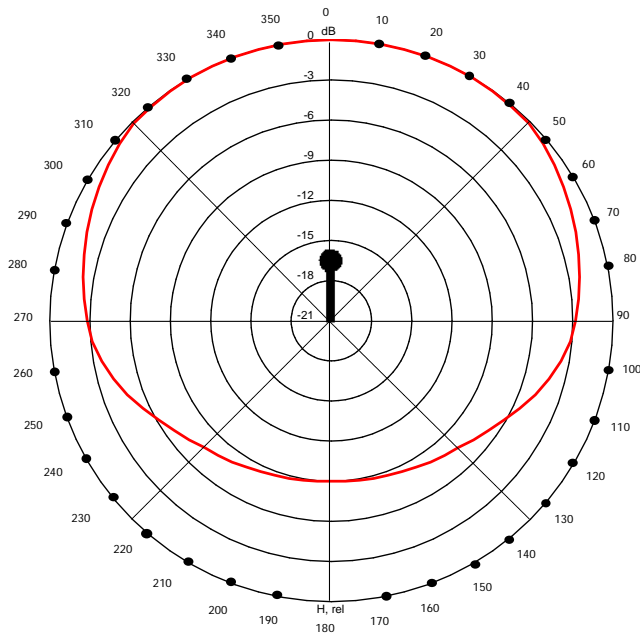

V pol - Horizontal Radiation Pattern (H-Plane)

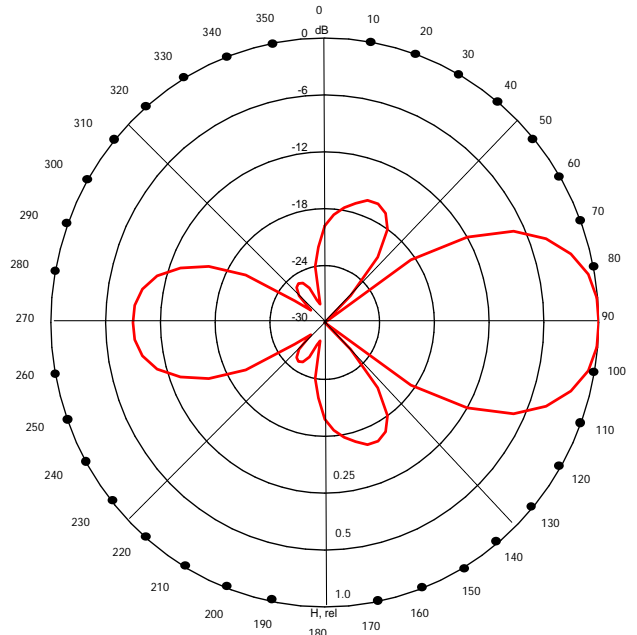

V pol - Vertical Radiation Pattern (E-Plane)

Frequency:	698-806 MHz
Gain:	5.5 dBd (7.6 dBi) single bay w/o electrical beam tilt
-3dB HPBW (H-Plane):	190 degrees
-3dB HPBW (E-Plane):	30 degrees
Impedance:	50 ohms
VSWR:	<1.3:1 (1.2:1 typical)
Polarization:	Vertical
Max. Input Power:	500W standard, higher input power available
PIM:	< -135 dBc
Input Connector:	N female
F/B Ratio:	9 dB
XPD:	20 dB typical
Beam tilt:	Any degree of electrical or mechanical available

### Mechanical

- Exterior material: Structural aluminum, all weld
- Interior material: Machined brass
- Dimensions: 740 mm X 175 mm
- Grounding: Antenna and radiating elements are DC grounded for lightning protection
- Mounting clamps: HDG clamps are included for attachment to customer supplied mast up to 63 mm (2.5") OD.
- Icing protection: Antenna design, internal network, and feed point cover ensure reliable operation under adverse weather conditions
- Shipping: The antenna is shipped fully assembled



# of Bays	Gain (dBd)	Gain (dBi)	Gain (Pr)	Weight (Kg)	Overall Height (meters)	Windload N @ 160 km/h	
						Frontal	Lateral
1	5.5	7.6	3.6	2.5	0.8	46	64
2	8.6	10.7	7.2	5.0	1.6	92	128
3	10.4	12.5	11.0	7.5	2.4	138	192
4	11.8	13.9	15.1	10.0	3.2	184	256
6	13.5	15.6	22.4	15.0	4.8	276	384
8	15.0	17.1	31.6	20.0	6.4	368	512
12	16.5	18.5	44.7	30.0	9.6	552	768

**698-806 MHz**

*700 MHz Band*

Antenna Height { H } in Meters Antenna Spacing { S } in mm		
No of Bays	H	S
1	0.8	-
2	1.6	800
3	2.4	800
4	3.2	800
6	4.8	800
8	6.4	800
12	9.6	800

